



Cambridge International AS & A Level

CANDIDATE
NAME

CENTRE
NUMBER

--	--	--	--	--

CANDIDATE
NUMBER

--	--	--	--

PHYSICS

9702/52

Paper 5 Planning, Analysis and Evaluation

May/June 2026

1 hour 15 minutes

You must answer on the question paper.

No additional materials are needed.

INSTRUCTIONS

- Answer **all** questions.
- Use a black or dark blue pen. You may use an HB pencil for any diagrams or graphs.
- Write your name, centre number and candidate number in the boxes at the top of the page.
- Write your answer to each question in the space provided.
- Do **not** use an erasable pen. Do **not** use correction fluid or tape.
- Do **not** write on any bar codes.
- You may use a calculator.
- You should show all your working and use appropriate units.

INFORMATION

- The total mark for this paper is 30.
- The number of marks for each question or part question is shown in brackets [].

This document has 8 pages.

- 1 A capacitor is connected to a reed switch, a d.c. power supply of negligible internal resistance and a resistor as shown in Figure 1.1.

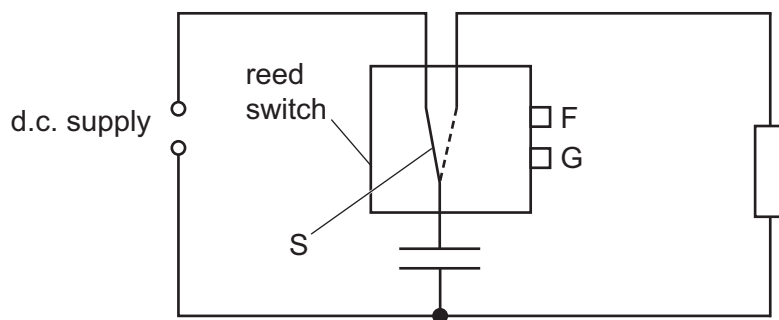


Figure 1.1

The reed switch is a device that contains a two-way switch S that connects the capacitor either to the d.c. supply or to the resistor.

An alternating current is supplied to terminals F and G of the reed switch. This causes switch S to vibrate. The frequency f of switch S is the same as the frequency of the alternating current.

For half of one cycle of the alternating current, the capacitor is charged from the d.c. supply. For the other half of the cycle, the capacitor discharges through the resistor. The mean current in the resistor is I .

The capacitor is created from two circular metal plates in air. The plates each have area A . The plates are separated by a small distance h .

It is suggested that I is related to h by the relationship

$$\frac{KA}{h} = \frac{I}{fE}$$

where E is the electromotive force (e.m.f.) of the d.c. supply and K is a constant.

Plan a laboratory experiment to test the relationship between I and h .

Draw a diagram showing the arrangement of your equipment.

Explain how the results could be used to determine a value for K .

In your plan, you should include:

- the procedure to be followed
- the measurements to be taken
- the control of variables
- the analysis of the data
- any safety precautions to be taken.





Diagram

This image shows a full page of white paper with horizontal dashed lines, typical of primary school writing paper. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.



[15]



- 2 A bar is fixed between two stands. A rod of mass M is suspended from the bar by two parallel strings as shown in Figure 2.1.

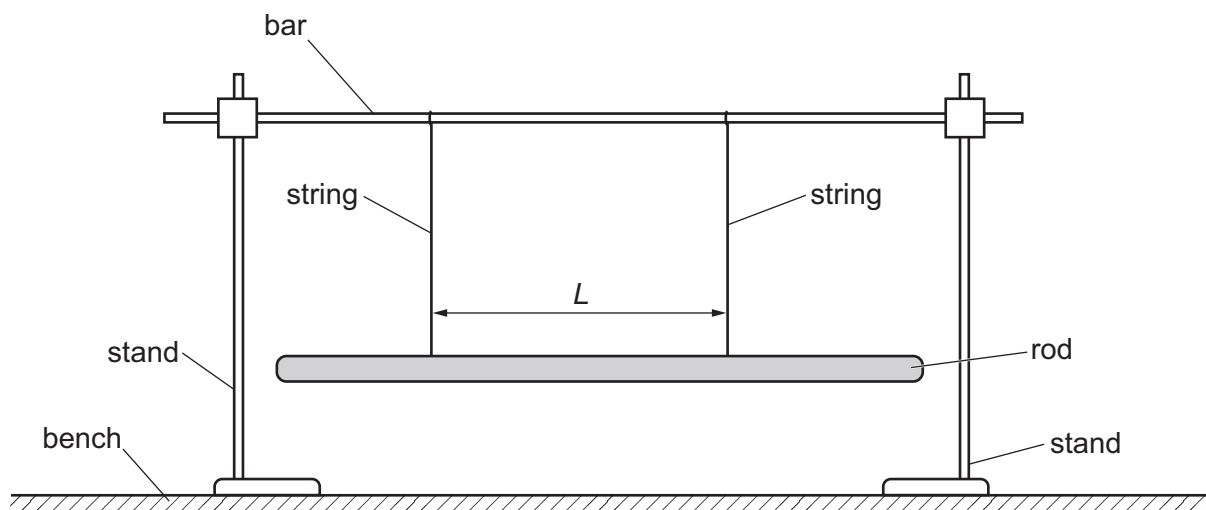


Figure 2.1

The separation of the two strings is L .

One end of the rod is displaced horizontally and then released. The rod rotates with oscillations about its centre. The time for 10 oscillations is t . The period T of the oscillations is determined.

The experiment is repeated for different values of L .

It is suggested that T and L are related by the equation

$$T = \frac{2\pi}{L} \sqrt{\frac{\alpha D}{Mg}}$$

where g is the acceleration of free fall, D is the distance between the bar and the rod, and α is a constant.

- (a) A graph is plotted of T^2 on the y-axis against $\frac{1}{L^2}$ on the x-axis.

Determine an expression for the gradient.

gradient = [1]



(b) Values of L and t are given in Table 2.1.

Table 2.1

L/cm	t/s	$\frac{1}{L^2}/\text{m}^{-2}$	T/s	T^2/s^2
27.4	15.8 ± 0.2			
30.4	14.5 ± 0.2			
34.8	12.6 ± 0.2			
40.8	10.8 ± 0.2			
48.4	9.2 ± 0.2			
55.2	8.0 ± 0.2			

Calculate and record values of $\frac{1}{L^2}/\text{m}^{-2}$, T/s and T^2/s^2 in Table 2.1. Include the absolute uncertainties in T and T^2 . [2]


(c) (i) Plot a graph of T^2/s^2 against $\frac{1}{L^2}/\text{m}^{-2}$. Include error bars for T^2 . [2]

(ii) Draw the straight line of best fit and a worst acceptable straight line on your graph. Label both lines. [2]

(iii) Determine the gradient of the line of best fit. Include the absolute uncertainty in your answer.

gradient = [2]



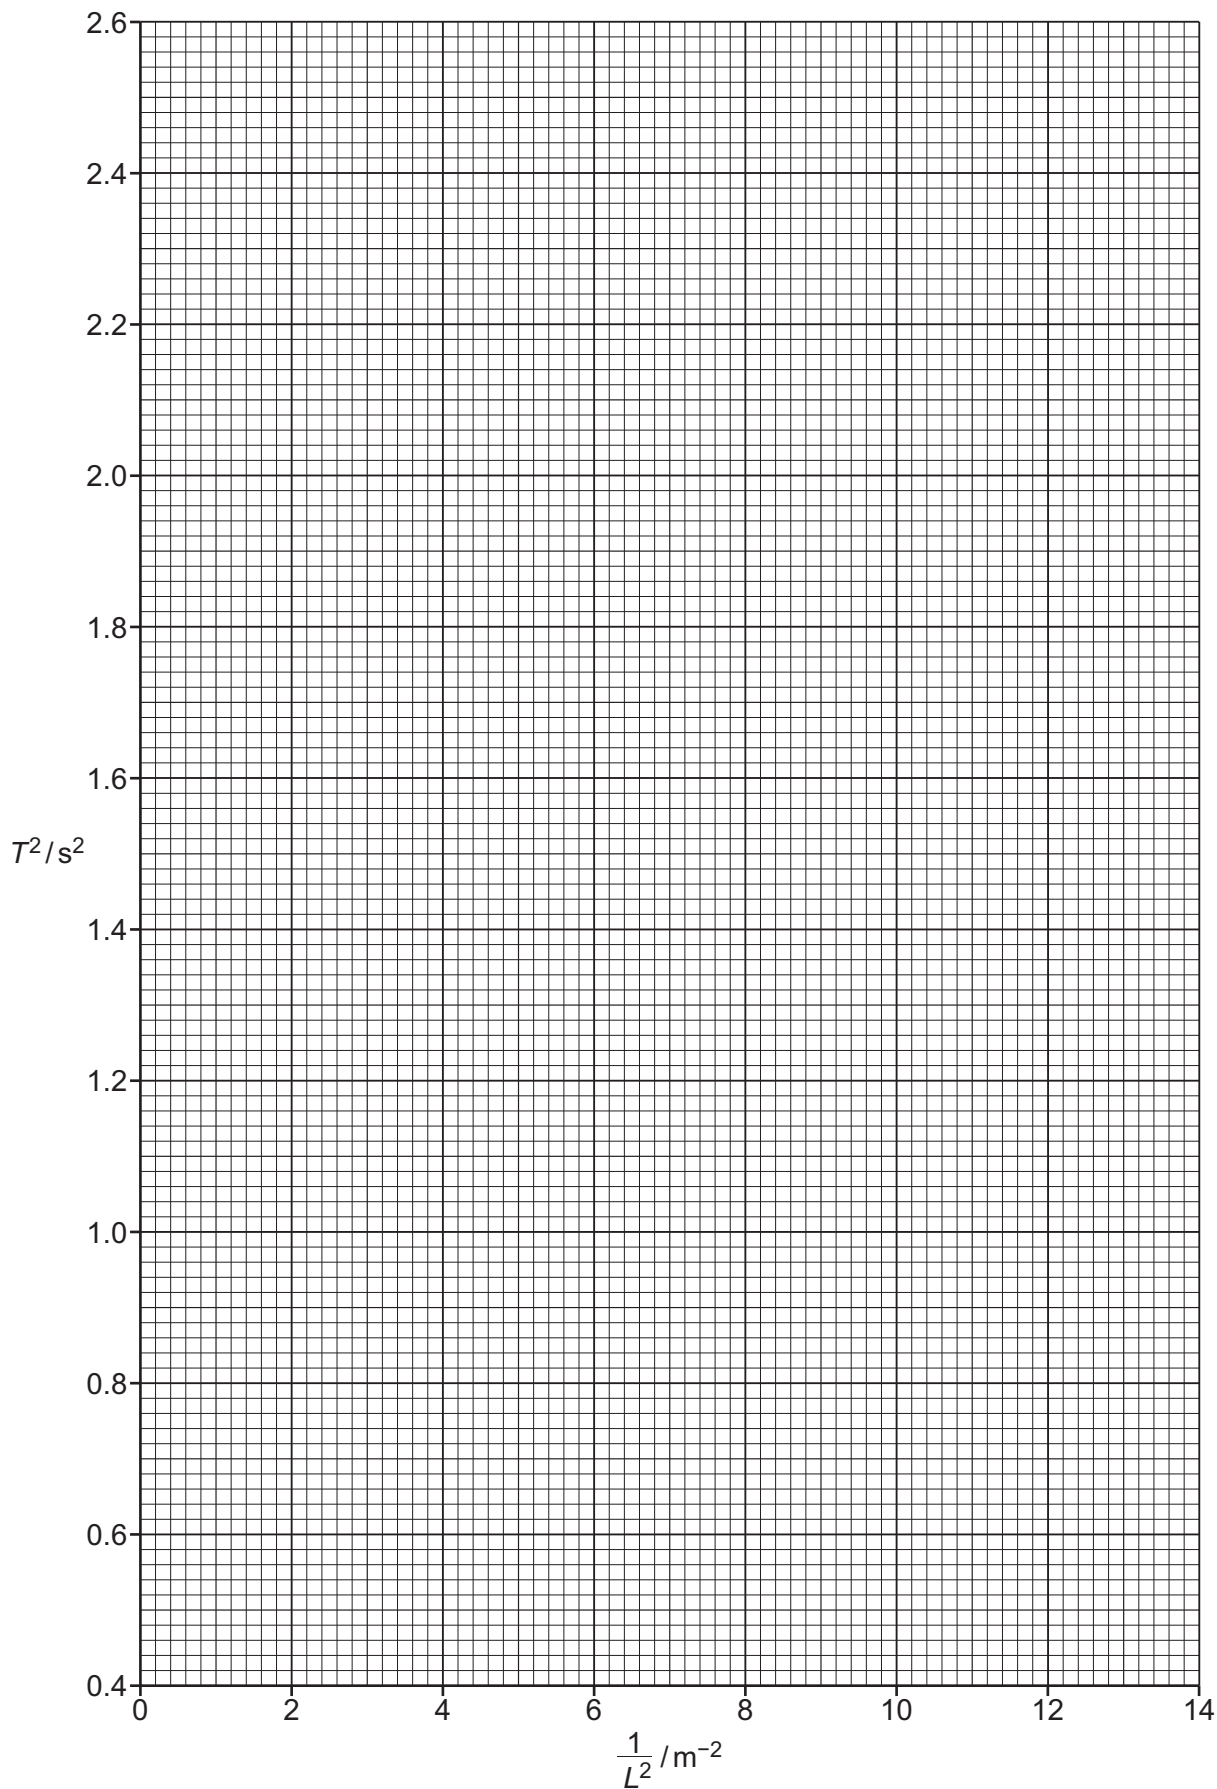



(d) The distance between the bar and the rod is measured several times:

0.826 m

0.829 m

0.824 m

0.821 m.

Determine the mean distance D . Include the absolute uncertainty.

$$D = \dots\dots\dots \text{ m [1]}$$

(e) (i) Using your answers to **2(a)**, **2(c)(iii)** and **2(d)**, determine the value of α . Include an appropriate unit.

Data: $g = 9.81 \text{ m s}^{-2}$
 $M = (97 \pm 2) \text{ g}$

$$\alpha = \dots\dots\dots \text{ [2]}$$

(ii) Determine the percentage uncertainty in α .

$$\text{percentage uncertainty in } \alpha = \dots\dots\dots \% \text{ [1]}$$

(f) The experiment is repeated. Determine the separation L of the two strings that gives a value of T of $(2.20 \pm 0.02) \text{ s}$. Include the absolute uncertainty.

$$L = \dots\dots\dots \text{ m [2]}$$

[Total: 15]

